


H-CLAD™ Span Chart

Select the hole pattern and panel size that best fits your application.

Perf Diameter (IN)	Center Spacing (IN)	Pattern Orientation	% Open Area	0.125" Aluminum			0.190" Aluminum		
				30 PSF (IN)	50 PSF (IN)	70 PSF (IN)	30 PSF (IN)	50 PSF (IN)	70 PSF (IN)
0.250	0.500	Staggered	22.7	48	36	-	48	48	48
0.375	0.625	Staggered	32.6	42	36	-	48	48	48
0.375	0.750	Staggered	22.7	48	36	-	48	48	48
0.500	0.750	Staggered	40.3	42	-	-	48	48	42
0.500	1.000	Staggered	22.7	48	36	-	48	48	48
0.750	1.000	Staggered	51.0	36	-	-	48	42	36
0.750	1.250	Staggered	32.6	42	36	-	48	48	48
1.000	1.250	Staggered	58.0	36	-	-	48	42	36
1.000	2.000	Staggered	22.7	48	36	-	48	48	48
1.500	1.750	Staggered	66.6	-	-	-	48	42	36
2.000	2.250	Staggered	71.7	-	-	-	48	42	36
3.000	3.250	Staggered	77.3	-	-	-	48	42	36

Standard Panel Widths (IN)		
36	42	48

Standard Panel Lengths (IN)		
72	96	120

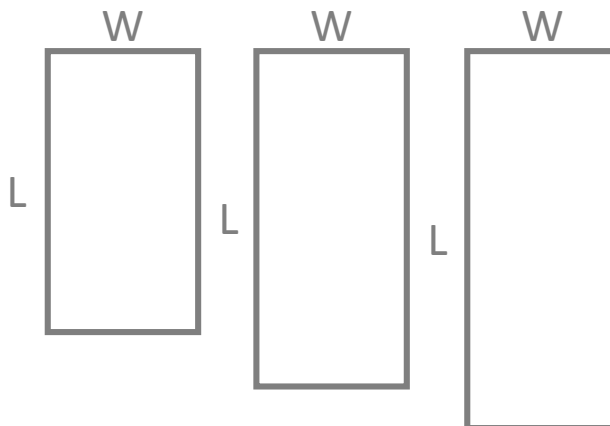

Please contact Hendrick for any custom pattern or panel size requirements.